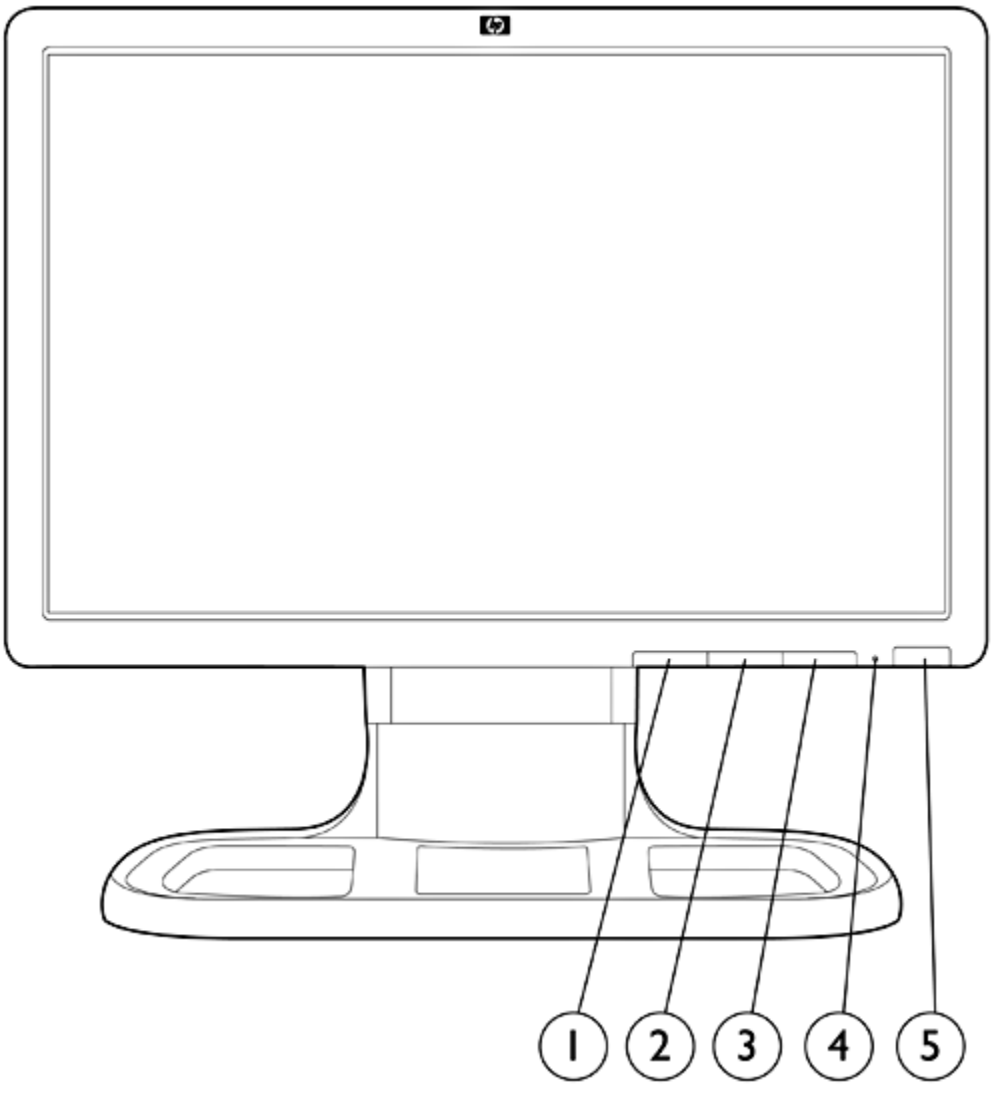


1. Menu/select: Opens, selects or exits the OSD menu.
2. "-"/Auto: Navigates backward through the OSD menu and decreases adjustment levels; when the OSD menu is inactive, activates the auto adjustment feature to optimize the screen image.
3. "+": Navigates forward through the OSD menu and increases adjustment levels.
4. Power LED: fully powered = green; sleep mode = amber; sleep timer mode = flashing amber.
5. Power: Turns the monitor on or off.

---

## Model

GP537AA

| | | |
|---|---|---|
| Panel | Type | 19-in (48.25-cm) Wide-Aspect Active Matrix TFT (thin film transistor) |
| | Viewable Image Area (diagonal) | 19 in (48.25 cm) wide (WXGA+); diagonally measured |
| | Screen Opening (W x H) | 16.1 x 10.1 in (40.98 x 25.67 cm) |
| | Viewing Angle (typical) | Up to 160° horizontal/160° vertical (10:1 minimum contrast ratio) |
| | Brightness (typical)* | 300 nits (cd/$m^2$) |
| | Contrast Ratio (typical)* | 1000:1 |
| | Response Rate | ≤5 ms (on/off) |
| | Pixel Pitch | 0.285 mm |
| | Backlight Lamp Life (to half brightness) | 50 K hours |
| | * All performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower. | |
| On Screen Display (OSD) Controls | Buttons or Switches | Auto adjust/OSD down, OSD UP, OSD menu select, power |
| | Languages | English, French, German, Spanish, Italian, Dutch, and Japanese, S. Chinese |
| | User Controls | Brightness, contrast, positioning, color temperature (6500k, 9300k, custom), individual color control, serial number, display, clock, clock phase, monitor management, factory reset, zoom |
| Signal Interface/ Performance | Horizontal Frequency | 24 to 83 kHz |
| | Vertical Frequency | 50 to 76 Hz |
| | Native Resolution | 1440 x 900 @ 60 Hz |
| | Preset VESA Graphic Modes (non-interlaced) | 1280 x 1024 @ 60 Hz and 75 Hz |
| | | 1024 x 768 @ 60 Hz and 75 Hz |
| | | 800 x 600 @ 60 Hz and 75 Hz |
| | | 640 x 480 @ 60 Hz and 75 Hz |
| | Text Mode | 720 x 400 @ 70 Hz |
| | Mac Mode | 1152 x 870 @ 75 Hz and 832 x 624 @ 75 Hz |
| | Sun Mode | 1152 x 900 @ 66 Hz |
| | Maximum Pixel Clock Speed | 140 MHz (analog input) |
| | User Programmable Modes | Yes, 10 |
| | Anti-Glare | Yes |
| | Anti-Static | Yes |
| | Default Color Temperature | 6500 K |
| Video Input | Plug and Play | Yes |
| | Self Powered USB 2.0 Hub | No |
| | Input Signal | VGA |
| | Input Impedance | 75 ohms ± 10% |
| | Sync Input | TTL separate synch or Composite Sync |
| | VGA Cable | 15 pin D-sub VGA |
| | VGA Cable Length | 5.9 ft (1.8 m) |
| Power | Input Power | Auto-Sensing, 100 to 240 VAC, 50 +/-3 Hz to 60 +/-3 Hz) |
| | Frequency | 45 to 63 Hz |
| | Typical Power Consumption | 37 watts |
| | Maximum | 50 watts |
| | Power Saving | 2 watts standby;1 watt off |

| | | | |
|---|---|---|---|
| | Power Cable Length | 6.2 ft (1.9 m) | |
| Mechanical | Dimensions (H x W x D) | Unpacked w/stand (stand lowered) | 14.06 x 17.56 x 10.24 in (35.7 x 44.6 x 26.02 cm) |
| | | Unpacked w/stand (stand raised) | 19.37 x 17.56 x 10.24 in (49.2 x 44.6 x 26.02 cm) |
| | | Unpacked w/o stand (head only) | 11.9 x 17.6 x 2.3 in (30.1 x 44.6 x 5.9 cm) |
| | | Packaged | 16.57 x 22.13 x 13.54 in (42.1 x 56.2 x 34.4 cm) |
| | Weight | Unpacked | 16.53 lb (7.5 kg) |
| | | Head only | 9.3 lb (4.2 kg) |
| | | Packaged | 22.05 lb (10.0 kg) |
| | Tilt Range | -3° to + 20° vertical | |
| | Swivel Range | -180° to 180° horizontal | |
| | Height Adjustable | Yes, 5.3 in (13.5 cm) | |
| | Pivot Rotation | No | |
| | Base and Stand | Detachable, ships attached | |
| Environmental | Temperature – Operating | 41° to 104° F (5° to 40° C) | |
| | Temperature – Non-operating | -29° to 140° F (-34° to 60° C) | |
| | Humidity – Operating | 20% to 80% non-condensing | |
| | Humidity – Non-operating | 5% to 95%, 38.7° C max wet-bulb | |
| | Altitude – Operating | +12,000 ft (3,658 m) | |
| | Altitude – Non-operating | +40,000 ft (12,192 m) | |
| Environmental Data | Eco-Label Certifications and Declarations | This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:<br>• ENERGY STAR®<br>• US Federal Energy Management Program (FEMP)<br>• IT ECO declaration<br>• TCO 03<br>• Taiwan Green Mark<br>• CECP<br>• EU Flower (2001/686/EC & 2001/687/EC)<br>• GEEA | |
| | Energy Consumption (in accordance with US Energy Star test method) | AC Input Voltage at 100 VAC +/- 5 VAC, 50 Hz +/- 3 Hz | AC Input Voltage at 115 VAC +/- 5 VAC, 60 Hz +/- 3 Hz | AC Input Voltage at 230 VAC +/- 5 VAC, 50 Hz +/- 3 Hz |
| | Normal Operation | 36 watts | 37 watts | 37 watts |
| | Sleep | 2 watts | 2 watts | 2 watts |
| | Off | 1 watt | 1 watt | 1 watt |
| | Heat Dissipation* | 100 VAC, 50 Hz | 115 VAC, 60 Hz | 230 VAC, 50 Hz |
| | Normal Operation | 123 BTU/hr | 123 BTU/hr | 123 BTU/hr |
| | Sleep | 6.82 BTU/hr | 6.82 BTU/hr | 6.82 BTU/hr |
| | Off | 3.41 BTU/hr | 3.41 BTU/hr | 3.41 BTU/hr |
| | * Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour. | | |
| | Ergonomics | The monitor meets the ergonomic requirement of EN-ISO 13406-2 for flat panel displays. | |
| | Additional Information | This HP product is designed to comply with the Waste Electrical and | |

Electronic Equipment (WEEE) Directive, 2002/96/EC.

Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.

Display meets the requirement for low frequency electromagnetic fields per TCO and prEN50279 A/B/C.

This product contains 0% recycled materials (by wt.)

This product is 95% recyclable when properly disposed of at end of life.

Packaging Materials

- Corrugated Carton – 0.96 kg
- HDPE Bag – 0.09 kg
- Polystyrene – 0.55 kg

## Material Usage

This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at: www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html)

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants – may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel – finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

## Packaging

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and

| | | |
|---|---|---|
| | | DIN 6120 standards. |
| | End-of-life Management and Recycling | Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: www.hp.com/recycle or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner. |
| | Hewlett-Packard Corporate Environmental Information | For more information about HP's commitment to the environment:<br>Global Citizenship Report<br>www.hp.com/hpinfo/globalcitizenship/gcreport/index.html<br>Eco-label certifications<br>www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html<br>ISO 14001certificates:<br>www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html |
| Options | HP Silver LCD Speaker Bar—Part number: EE418AA | Powered directly by the connected PC, the Speaker Bar seamlessly attaches to the monitor's lower bezel to bring full audio support to select HP flat panel monitors. Features include dual speakers with full sound range and external jack for headphones. Sold separately. For more information, refer to the HP Speaker Bar QuickSpecs. |
| | Kensington Security Lock—Part number PC766A | Combines aircraft-grade steel and Kevlar fiber to securely lock down your monitor and help prevent theft. |
| Other | Accessories Included | VGA cable – connects the graphic card's VGA connector to the monitor's VGA input |
| | Software | HP Display Assistant is a software utility that allows monitor adjustment and color calibration using the Display Data Channel Command Interface (DDC/CI) protocol of the connected PC.<br>HP Display LiteSaver allows you to schedule Sleep mode at preset times to help protect the monitor against image retention, drastically lower power consumption and energy costs, and extend the lifespan of the monitor. |
| | User Guide Languages | English, B. Portuguese, French, LA Spanish, Korean, S. Chinese, T. Chinese, Bahasa, Japanese, Danish, Finnish, German, Norwegian, Spanish, Swedish, Greek, Polish, Russian, Slovenian, Turkish |
| | Warranty Languages | English, Canadian French, LA Spanish, Brazilian Portuguese, Danish, German, Castilian Spanish, French, Italian, Dutch, Norwegian, Finnish, Swedish, Bahasa Indonesian, Korean, T. Chinese, S. Chinese |
| | Color | All carbonite |
| | VESA External Mounting | Yes (Two sets of Standard 4 hole pattern, 100 mm) Use of the top VESA 4 hole pattern will allow the user to set monitor head lower to the desk surface |
| | Kensington Lock-ready | Yes |
| Certification and Compliance | TCO'03, ISO 13406-2 VDT Guidelines Approval, CISPR Requirements, VCCI Approvals, MIC (Korean) Requirements, CSA, Australian ACA Approval, "GS" Mark, TUV Approvals, CE Marking, FCC Approval, ENERGY STAR® Qualified, PC-2001 Certified, Microsoft® Windows® Certification (Microsoft® Windows® 98, Microsoft Windows 2000, Microsoft Windows XP, and Windows Vista®) | |
| Compatibility | Compatible with platforms using the VESA standard video modes. Recommended for use with HP products. | |
| Service and Warranty | Three years parts, labor, and on-site service. 24-hour, 90-day, toll-free technical support. Replacement options may include second business day on-site service, or next business day direct replacement, at HP's sole discretion. With direct replacement, HP will ship a replacement display product directly to you. Using the prepaid shipping labels provided, return your failed display to HP in the same packaging as the replacement. Certain restrictions and exclusions apply. For details see your product warranty or contact HP Customer Support. | |







1. HP Quick Release security screw
2. Integrated HP Quick Release
3. Height-adjustable monitor mount
4. Integrated cable management slots
5. Mounting bracket security screw installation points
6. PC and thin client mounting bracket (unique four-hole pattern for thin clients
7. PC and thin client mounting bracket (unique four-hole pattern for PCs
8. Power supply support and rear cable management loops

| | | | |
|---|---|---|---|
| Mechanical | Tilt range | -3 to +20 degrees vertical tilt | |
| | Swivel range | -180° to + 180° | |
| | Height adjustable | Yes, range: 5.3 in (13.5 cm) | |
| | Pivot rotation | No | |
| | Dimensions (Unpackaged) | Cable management slot in: | 16.5 x 14.5 x 10.25 in (41.91 x 36.83 x 26.06 cm) |
| | | Cable management slot out: | 16.5 x 14.5 x 12.25 in (41.91 x 36.83 x 31.12 cm) |
| | Weight | Unpackaged | 6.12 lbs (2.78 kg) |
| Other | Accessories included | Exclusive Integrated Work Center VGA video cable, HP dc7800 Ultra-slim Desktop cable cover (rear port cover), PC mounting bracket, HP Quick Release, documentation kit, and User CD | |
| | User guide languages | English, French, German, Spanish, Italian, Dutch, Brazilian Portuguese, Danish, Finnish, Greek, Japanese, Korean, Latin American Spanish, Norwegian, Polish, Russian, Slovenian, Turkish, Swedish, Traditional Chinese, Simplified Chinese | |
| | Warranty languages | English, German, French, Italian, Spanish and Japanese | |
| | Color | Carbonite | |
| | VESA external mounting | Yes (Standard 4 hole pattern, two separate 100 mm patterns on the mounting bracket) | |
| | Option kit contents | Integrated Work Center Stand and PC mounting bracket, Integrated Work Center VGA video cable, HP Compaq dc7800 Ultra-slim Desktop cable cover (rear cover), Quick Release bracket (to attach to back of monitor) | |
| Supported weight capacity | The Integrated Work Center Stand has been designed to support the weight of a 17-, 19-, or 19-inch wide format monitor only. | | |

# HP LCD Monitor Quick Release (included in IWC stand)

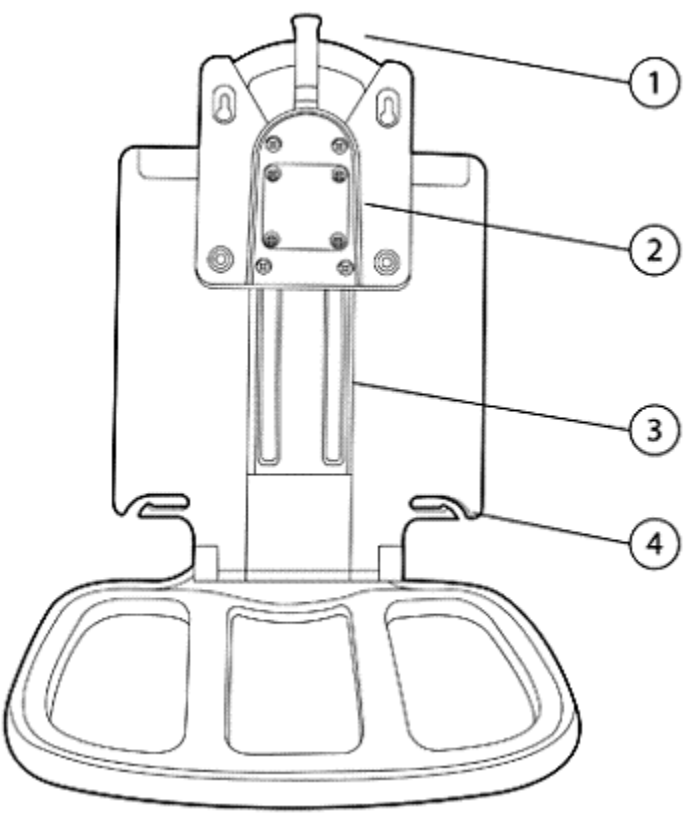


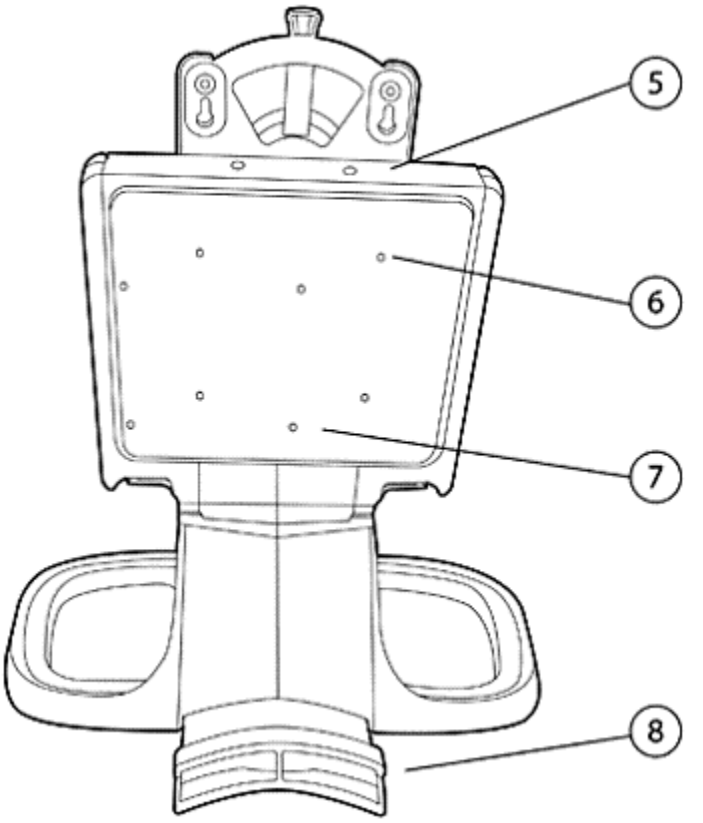1. Release/locking
2. Four 100 mm VESA mount screw holes
3. Mounting holes for attachment to back of monitor stands




1. Four 100 mm VESA mount screw holes

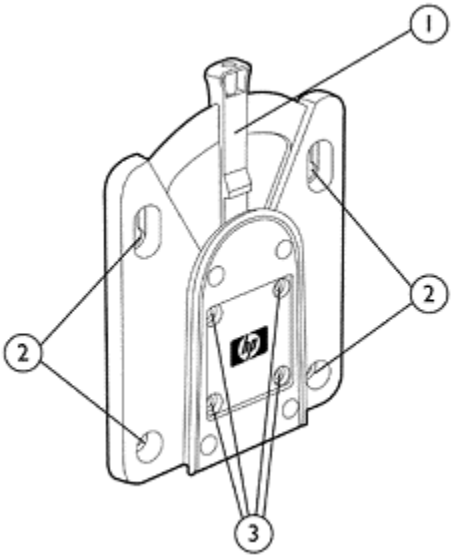


1. Locking pin screw
2. Locking pin hole on release/locking arm

| | | | |
|---|---|---|---|
| Mechanical | Dimensions (H x W x D) | Packaged: | 7.8 x 6.25 x 1.5 in (19.8 x 15.9 x 3.8 cm) |
| | | Unpackaged: | 6.3 x 5.2 x 0.65 in (16 x 13.2 x 1.65 cm) |
| | Weight | Packaged: | 1.1 lb (0.49 kg) |
| | | Unpackaged: | 0.82 lb (0.37 kg) |

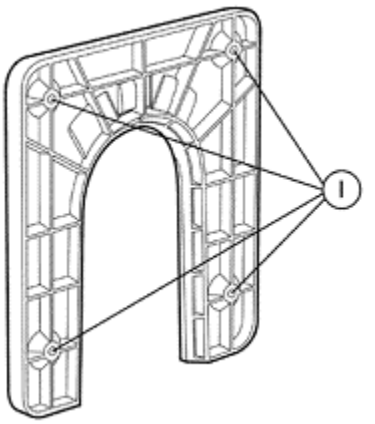Additional components

- Eight 10 mm mounting screws (for attachment to VESA compliant monitor mounts)
- Eight 15.5 mm mounting screws (for attachment to HP Compaq t5000 Thin Client products)
- Four 20 mm mounting screws (for attachment to back of select HP flat panel monitor stands)
- One Quick Release "locking" screw

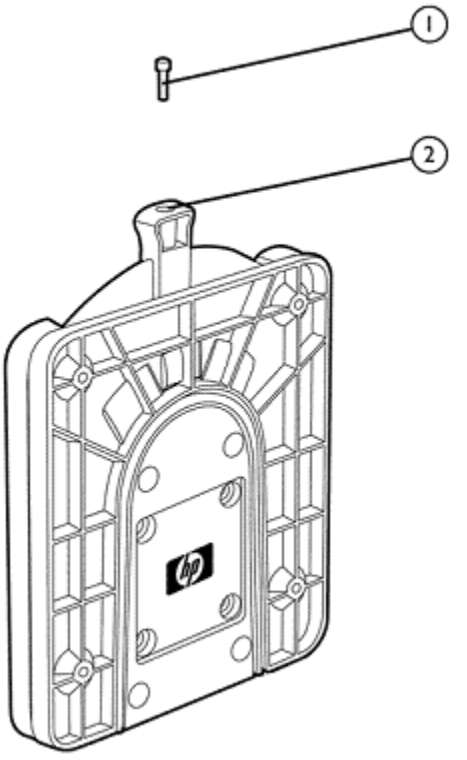Color: Carbonite

NOTE: No HP monitors allow positioning of a thin client product between a monitor screen and its stand.

NOTE: The Quick Release device is not to be used between a monitor screen and its stand unless provided that way from the factory.

NOTE: Under no circumstances is the Quick Release device intended to be used in an orientation where the Release/Lock lever is oriented downward.

Supported weight capacity: The HP LCD Monitor Quick Release has been designed to support a maximum of up to 24 lbs (10.9 kg) depending upon the mounting configuration used. Please note this is a total weight limit for all devices mounted, i.e. the combined weight of the monitor and a second device such as an HP Thin Client cannot exceed 24 pounds. Because mounting surfaces vary widely and the final mounting method and configuration may vary, mounting fasteners are not supplied (other than the VESA-compliant screws). HP recommends that you consult with a qualified engineering, architectural or construction professional to determine the appropriate type and quantity of mounting fasteners required for your application and to ensure that your mounting solution is properly installed to support applied loads.

---

© Copyright 2008 Hewlett-Packard Development Company, L.P.

Microsoft and Windows are trademarks or registered trademarks of Microsoft Corporation in the U.S. and other countries. Windows Vista is either a registered trademark or trademark of Microsoft Corporation in the United States and/or other countries. ENERGY STAR is a registered mark owned by the U.S. government.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.